

Tank GT20

B5372

Service Engineer's Manual



PREFACE

Copyright

This publication, including all photographs, illustrations, and software, is protected under international copyright laws, with all rights reserved. Neither this manual, nor any material contained herein, may be reproduced without written consent of the manufacturer.

Copyright 2006

Version 1.0

Disclaimer

Information contained in this document is furnished by TYAN Computer Corporation and has been reviewed for accuracy and reliability prior to printing. TYAN assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TYAN products including liability or warranties relating to fitness for a particular purpose or merchantability. TYAN retains the right to make changes to product descriptions and/or specifications at any time, without notice. In no event will TYAN be held liable for any direct or indirect, incidental or consequential damage, loss of use, loss of data or other malady resulting from errors or inaccuracies of information contained in this document.

Trademark Recognition

All registered and unregistered trademarks and company names contained in this manual are property of their respective owners including, but not limited to the following.

TYAN and Tank GT20 B5372 are trademarks of TYAN Computer Corporation.

Intel, Xeon, and combinations thereof are trademarks of Intel Corporation.

AMD, Opteron, Athlon, and combinations thereof are trademarks of AMD Corporation.

Phoenix, PhoenixBIOS, and combinations thereof are trademarks of Phoenix Technologies.

Microsoft Windows is a trademark of Microsoft Corporation.

IBM, PC, AT, PS/2 are trademarks of IBM Corporation.

Winbond is a trademark of Winbond Electronics Corporation.

Portable Document Format (PDF) is a trademark of Adobe Corporation.

Federal Communications Commission (FCC)



Notice for the USA Compliance Information Statement (Declaration of Conformity Procedure) DoC FCC Part 15: This device complies with part 15 of the FCC Rules

Operation is subject to the following conditions:

- 1) This device may not cause harmful interference, and
- 2) This device must accept any interference received including interference that may cause undesired operation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try one or more of the following measures:
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and the receiver.
 - Plug the equipment into an outlet on a circuit different from that of the receiver.

Consult the dealer on an experienced radio/television technician for help.

Notice for Canada

This apparatus complies with the Class B limits for radio interference as specified in the Canadian Department of Communications Radio Interference Regulations. (Cet appareil est conforme aux normes de Classe B d'interférence radio tel que spécifié par le Ministère Canadien des Communications dans les règlements d'interférence radio.)



Notice for Europe (CE Mark) This product is in conformity with the Council Directive 89/336/EEC, 92/31/EEC (EMC).

CAUTION: Lithium battery included with this board. Do not puncture, mutilate, or dispose of battery in fire. Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by manufacturer. Dispose of used battery according to manufacturer instructions and in accordance with your local regulations.

About this Manual

This manual provides you with instructions on installing your Tank GT20. This manual is intended for experienced users and integrators with hardware knowledge of personal computers.

This manual consists of the following parts

- Chapter 1:** Provides an Introduction to the Tank GT20 B5372 bare-bones, packing list, describes the external components, gives a table of key components, and provides block diagrams of the system.
- Chapter 2:** Covers procedures on installing the CPU, memory modules, an optional PCI-X card, and hard drives.
- Chapter 3:** Covers removal and replacement procedures for pre-installed components
- Appendix:** Provides information on installing SMDC cards and describes the differences between mainboard BIOS and system BIOS. The cable connection tables are also provided for reference of system setup.

For information on the mainboard, please refer to the attached mainboard user's manual. You can find the detailed description about jumper and BIOS settings from the motherboard manual.

SAFETY INFORMATION

Before installing and using the Tank GT20, take note of the following precautions:

- Read all instructions carefully.
- Do not place the unit on an unstable surface, cart, or stand.
- Do not block the slots and opening on the unit, which are provided for ventilation.
- Only use the power source indicated on the marking label. If you are not sure, contact the Power Company.
- The unit uses a three-wire ground cable, which is equipped with a third pin to ground the unit and prevent electric shock. Do not defeat the purpose of this pin. If your outlet does not support this kind of plug, contact your electrician to replace your obsolete outlet.
- Do not place anything on the power cord. Place the power cord where it will not be in the way of foot traffic.
- Follow all warnings and cautions in this manual and on the unit case.
- Do not push objects in the ventilation slots as they may touch high voltage components and result in shock and damage to the components.
- When replacing parts, ensure that you use parts specified by the manufacturer.
- When service or repairs have been done, perform routine safety checks to verify that the system is operating correctly.
- Avoid using the system near water, in direct sunlight, or near a heating device.
- Cover the unit when not in use.

Table of Contents

Chapter 1: Overview

1.1	About the Tank GT20 B5372	1
1.2	Features	2
1.3	Unpacking	4
1.3.1	Opening the Box	4
1.3.2	Box Contents	5
1.3.3	Accessories	6
1.4	About the Product	8
1.4.1	Front View	8
1.4.2	Rear View	8
1.4.3	LED Definition	9
1.4.4	Internal View	10
1.4.5	Motherboard Block Diagram	11
1.4.6	Motherboard Layout	12

Chapter 2: Setting Up

2.0.1	Before You Begin	15
2.0.2	Work Area	15
2.0.3	Tools	15
2.0.4	Precautions	16
2.1	Rack Mounting	17
2.1.1	Installing the Server in a Rack	17
2.2	Installing Motherboard Components	23
2.2.1	Removing the Chassis Cover	23
2.2.2	Installing the Memory	24
2.2.3	Installing the CPU and Heatsink	25
2.2.4	Installing the PCI-X Card	29
2.3	Installing the External Hard Drive	31
2.4	Installing the Slim FDD (Option)	33

Chapter 3: Replacing Pre-Installed Components

3.1	Introduction	33
3.1.1	Work Area	33
3.1.2	Tools	33
3.1.3	Precautions	34
3.2	Disassembly Flowchart	35
3.3	Removing the Cover	36
3.4	Replacing Motherboard Components	37
3.4.1	Disconnecting All Motherboard Cables	37
3.4.2	Removing the Motherboard	39

3.5	Replacing the Slim CD-ROM	40
3.6	Replacing the LED Control Board	42
3.7	Replacing the M1012 Adapter Board	44
3.7.1	M1012 Adapter Board Features for B5372	46
3.7.2	System Fan Layout	47
3.7.3	M1012 Adapter Board Connector Pin Definition	48
3.8	Replacing the SATA Backplane	53
3.8.1	SATA Backplane Features.	55
3.9	Replacing the Power Supply	57

Appendix I: BIOS Differences

Appendix II: Cable Connection Tables

Appendix III: Installing SMDC Cards

Chapter 1: Overview

1.1 About the Tank GT20 B5372

Congratulations on your purchase of the TYAN Tank™ GT20 (B5372), a highly-optimized rack-mountable barebone system. The Tank GT20 (B5372) is designed to support two Intel® Dempsey™ / Woodcrest™ processors with 1066MHz FSB, providing a rich feature set and incredible performance. Leveraging advanced technology from Intel®, the Tank GT20 (B5372) server system is capable of offering scalable 32 and 64-bit computing, high-bandwidth memory design, and a lightning-fast PCI-E bus implementation. The Tank™ GT20 (B5372) not only empowers your company in today's demanding IT environment but also offers a smooth path for future application usage.

TYAN is also proud to deliver the Tank™ GT20 (B5372) in SATA flavor while supporting up to four (4) hot-swap hard drives, one (1) slim CD-ROM and one (1) optional slim floppy disk drive (not included). The Tank™ GT20 (B5372) uses TYAN's latest tooling-made chassis featuring a robust structure, tool-less and modularized design, and a solid mechanical enclosure. All of this provides the Tank™ GT20 (B5372) the power and flexibility to meet the needs of nearly any server application.



1.2 Tank Features

Enclosure

- Industry 19" rack-mountable 1U chassis storage bay
 - (4) 3.5" HDD bays
 - (1) slim CD-ROM bay
 - (1) slim FDD bay
- Dimension: D 22.4 x W 17.2 x H 1.72 inch (568x436x43.6mm)

Processor

- Supports two 771 sockets for up to two Intel® Dempsey / Woodcrest processors with 1066MHz FSB

Chipsets

- Intel 5000V (Blackford-VS) MCH
- Intel ESB2-E I/O Controller Hub
- SMSC SCH5017 Super I/O Chip
- SMSC EMC6D103S H/W monitoring IC

Memory

- Dual memory channels
- Supports six (6) fully-buffered DIMMS
- Max. 12/24GB of ECC DDR2 667/533 memory

Video

- XGI® XG20 PCI graphics controller
- 16MB DDR frame buffer of video memory

Storage

- Hard Disk Drives:
 - Standard model, B5372G20V4H: Support (4), SATA/SATA2 HDD with RAID 1, 0
 - Optional model, B5372G20W4H: Support (4) hot-swappable SAS HDD with RAID 1, 0
- Pre-installed slim type 24x CD-ROM

Expansion Slot

- One (1) 133MHz PCI-X riser (M2055) or one (1) x8 PCI-E (x16 socket, M2082-2) option

Motherboard

- TYAN S5372G3NR system board
- SSI CEB v1.04 footprint (12 x 10.5")

Back I/O Ports

- Stacked PS/2 mouse & keyboard ports
- COM1 connector
- One 15-pin VGA port
- Stacked two USB2.0 ports and one RJ45
- Stacked two USB2.0 ports and one RJ45

Front Panel Features

- I/O
 - (2) USB 2.0 ports
- LED indicators
 - Power LED
 - (2) LAN LEDs
 - HDD active LEDs
 - System Warning LED
 - ID LED
- Switches
 - Power
 - Reset
 - NMI
 - ID

Integrated Storage Controller

- ESB2-E
 - Single channel master mode supports two IDE devices
 - Support six (6) ports running up to 3.0Gb/s
- M9000 SO-DIMM SAS card for B5372G20W4H SKU (optional)

Networking

- Total three (3) LAN ports
 - Dual gigabit Ethernet ports (ESB2 embedded MAC with Intel 52863ED PHY)
 - One 10/100Mb port (Intel 82551QM controller)

Server Management

- System fan speed control and monitoring
- Supports TYAN Server Management (TSM)
- Optional Tyan SMDC kit, IPMI 2.0 compliant

BIOS

- Phoenix 8Mbit LPC Flash ROM
- Serial Console Redirect
- Supports ACPI 1.0b & APM1.2
- PnP, DMI2.0 WfM2.0 power management

System Cooling

- (4) 40*40*56mm 15000rpm + (1) 40*40*28mm 15000rpm heavy-duty fans
- Passive CPU heatsink

Regulatory

- FCC Class A (Declaration of Conformity)
- CE (Declaration of Congormity)
- VCCI
- C-Tick

Environment Temperature

- Operating temperature 5°C~35°C
- Non-operating temperature -40°C ~ 70°C

Power Supply

- EPS 1U, 650W with PFC
- 100V~240V AC input

1.3 Unpacking

This section describes the Tank GT20 package contents and accessories.

1.3.1 Opening the box

Open the box carefully and ensure that all components are present and undamaged. The product should arrive packaged as illustrated below.




Packaged accessories

1.3.2 Box Contents



Industry standard 1U chassis,
(4) hot-swap HDD bays



Tyan S5372 motherboard
(pre-installed)



24x slim CD-ROM drive
(pre-installed)



EPS 1U 650W PSU
(pre-installed)



(4) 40mm x 56mm



(1) 40mm x 28mm



LED and USB control board
(pre-installed)



Fan Adapter Board



SATA Backplane


1.3.3 Accessories

If any items are missing or appear damaged, contact your retailer or browse to TYAN's Web site for service:
<http://www.tyan.com>.

The Web site also provides information on other TYAN products, plus FAQs, compatibility lists, BIOS settings, and more.



Mounting Ears & Screws



(2) Heatsink



HDD Screws



Power Cables
Left to right: Europe, US



1 x Tyan Barebone driver CD



Barebone Manual



Riser Card

Rail Kit



Sliding Rails x 2



Sliding Brackets
Front L-Bracket x 2
Rear L-Bracket x 2



Mounting Bracket x 4



Screws Kit

FDD Kit



FDD Cable



FDD Backplane Cable




FDD Installing Rails & Screws


1.4 About the Product

The following views show you the product.

1.4.1 Front View

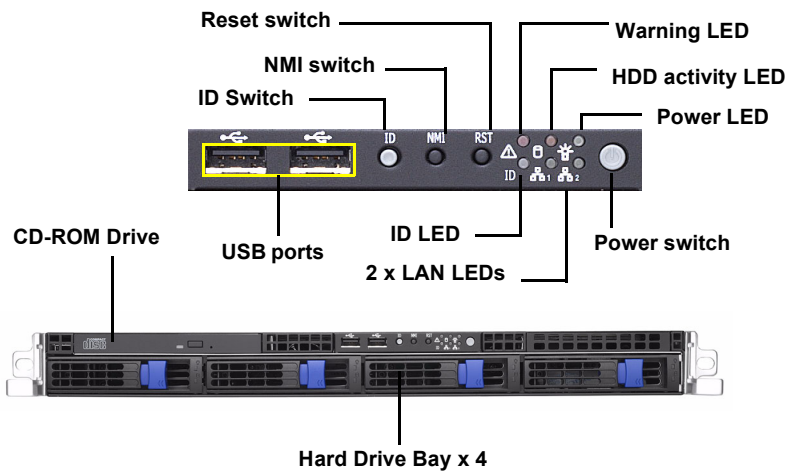

1.4.2 Rear View

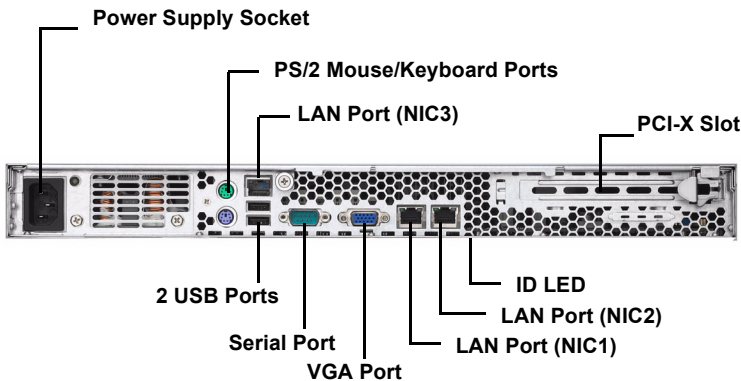

1.4.3 LED Definition

Front Panel


LED	Color	State	Description
Power	Green OFF	ON OFF	Power ON Power OFF
HDD Activity	Amber OFF	Random Blinking OFF	HDD access activity No disk activity
LAN1/LAN2 Linkage	Green Green OFF	ON Blinking OFF	LAN linked LAN accessing No LAN linked
Warning	Red OFF	ON OFF	Fan fails Normal
Hot Swappable HDD Tray Power LED	Green OFF	ON OFF	Power connected Power disconnected
Hot Swappable SATA HDD Access LED	Amber OFF	Random Blinking OFF	HDD Access Activity No disk activity
Hot Swappable SAS HDD Access LED	Amber Amber OFF	ON Random Blinking OFF	HDD ready HDD access activity HDD not ready
ID LED	Blue OFF	ON OFF	System is identified System is not identified

Rear I/O LED

*Right or Left is viewed from the rear.


LED	Color	State	Description
RJ45 NIC1 Linkage (Left Side)	Green Green OFF	ON Blinking OFF	LAN linked LAN accessing No LAN linked
RJ45 NIC1 Mode (Right Side)	Amber Green OFF	ON ON OFF	Gigabit mode 100M mode 10M mode
RJ45 NIC2 Linkage (Left Side)	Green Green OFF	ON Blinking OFF	LAN linked LAN accessing No LAN linked
RJ45 NIC2 Mode (Right Side)	Amber Green OFF	ON ON OFF	Gigabit mode 100M mode 10M mode
ID LED	Blue OFF	ON OFF	System is identified System is not identified

1.4.4 Internal View

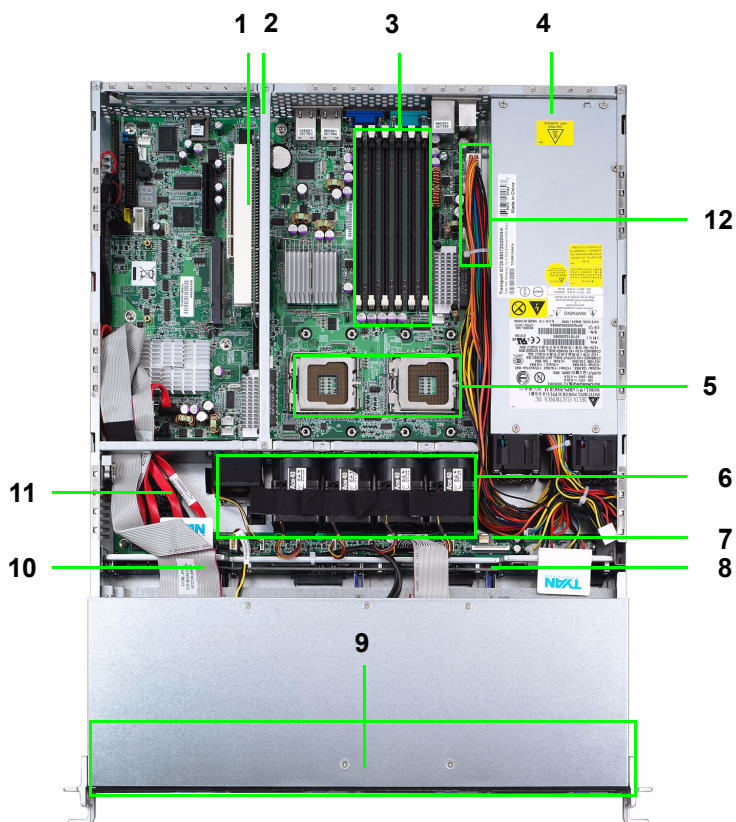


- | | |
|------------------------|-----------------------|
| 1. PCI-X Slot | 8. SATA Backplane |
| 2. Link Bar | 9. Four SATA HDD Bays |
| 3. Memory Slots | 10. CD-ROM Cable |
| 4. EPS Power Supply | 11. Four SATA Cables |
| 5. CPU | 12. Power Connector |
| 6. Fans | |
| 7. M1012 Adapter Board | |

1.4.5 Motherboard Block Diagram

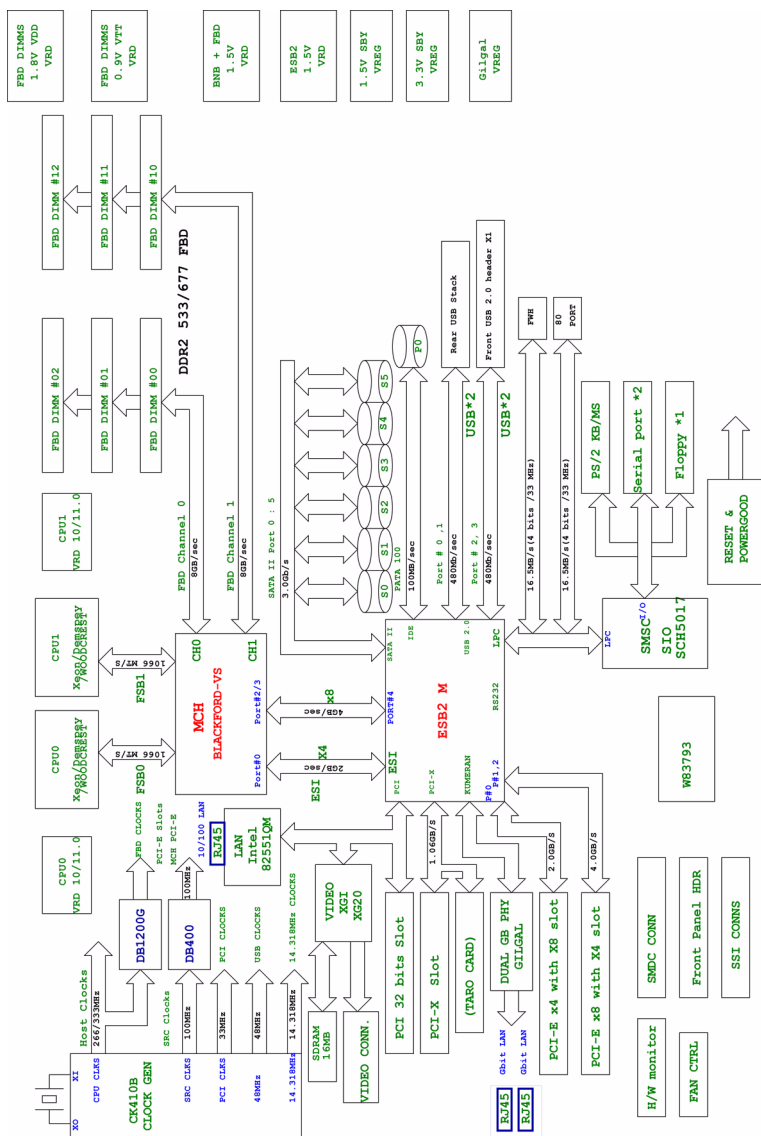

1.4.6 Motherboard (S5372) Layout

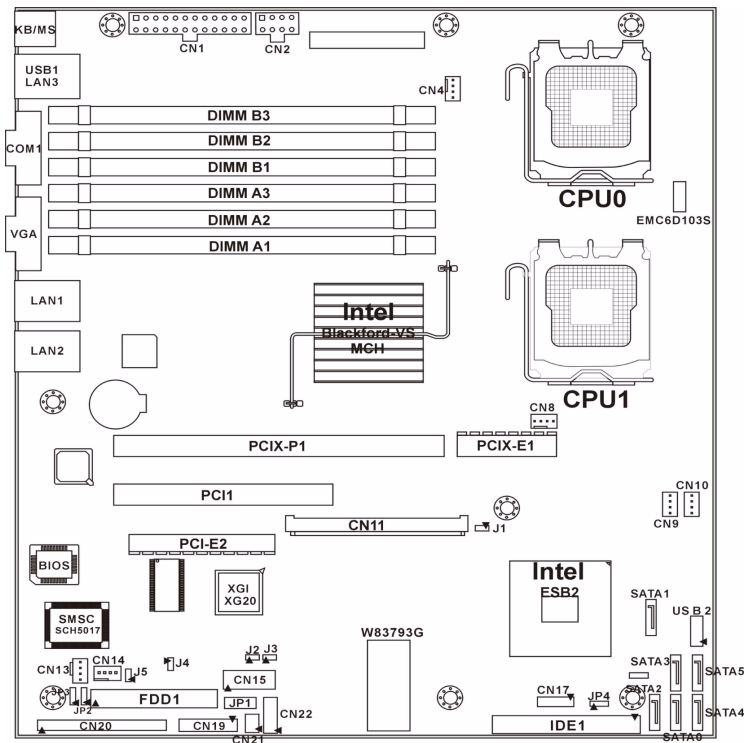

Jumpers & Connectors

Jumper /Connector	Function
J1	Front NMI Connector
J2	SATA LED Connector
J3	Front Intruder Connector
J4	Rear NMI Connector
J5	Rear Intruder Connector
JP1	IPMB Connector
JP2/JP3	ASF1.0/SMDC Select Header
JP4	Clear CMOS Jumper
CN1/CN2	ATX Power Connectors
CN4/CN8	CPU Fan Connectors (CN4: CPU0 Fan / CN8: CPU1 Fan)
CN9/CN10/ CN13/CN14	Chassis Fan Connectors (CN9: FAN2 / CN10: FAN1 CN13: FAN3 / CN14: FAN4)
CN11	TYAN SO-DIMM Connector
CN12	Front Panel USB 2.0 Connector
CN15	COM2 Header
CN19	Front Panel Header
CN20	SMDC Connector
CN21	LCM Module Header
CN17/CN22	Reserved

NOTE

Chapter 2: Setting Up

2.0.1 Before You Begin

This chapter explains how to install the CPU, CPU heatsink, memory modules, and hard drives. Instructions on inserting a PCI card are also given.

Take note of the precautions mentioned in this section when installing your system.

2.0.2 Work Area

Make sure you have a stable, clean working environment. Dust and dirt can get into components and cause malfunctions. Use containers to keep small components separated. Putting all small components in separate containers prevents them from becoming lost. Adequate lighting and proper tools can prevent you from accidentally damaging the internal components.

2.0.3 Tools

The following procedures require only a few tools, including the following:

- A cross head (Phillips) screwdriver
- A grounding strap or an anti-static pad

Most of the electrical and mechanical connections can be disconnected using your fingers. It is recommended that you do not use needle-nosed pliers to remove connectors as these can damage the soft metal or plastic parts of the connectors.

2.0.4 Precautions

Components and electronic circuit boards can be damaged by discharges of static electricity. Working on a system that is connected to a power supply can be extremely dangerous. Follow the guidelines below to avoid damage to the Tank GT20 or injury to yourself.

- Ground yourself properly before removing the top cover of the system. Unplug the power from the power supply and then touch a safely grounded object to release static charge (i.e. power supply case). If available, wear a grounded wrist strap. Alternatively, discharge any static electricity by touching the bare metal chassis of the unit case, or the bare metal body of any other grounded appliance.
- Avoid touching motherboard components, IC chips, connectors, memory modules, and leads.
- The motherboard is pre-installed in the system. When removing the motherboard, always place it on a grounded anti-static surface until you are ready to reinstall it.
- Hold electronic circuit boards by the edges only. Do not touch the components on the board unless it is necessary to do so. Do not flex or stress circuit boards.
- Leave all components inside the static-proof packaging that they ship with until they are ready for installation.
- After replacing optional devices, make sure all screws, springs, or other small parts are in place and are not left loose inside the case. Metallic parts or metal flakes can cause electrical shorts.

Notes:

- All connectors are keyed to only attach one way.
- Always use the correct screw size as indicated in the procedures.

2.1 Rack Mounting

After installing the necessary components, the Tank GT20 can be mounted in a rack using the supplied rack mounting kit.

Rack mounting kit

Sliding Rails x 2:

Sliding Brackets x 4 (Front x 2, Rear x 2)

Mounting Ears x 2

Screws Kit x 1

Mounting Brackets x 4

2.1.1 Installing the Server in a Rack

Follow these instructions to mount the Tank GT20 into an industry standard 19" rack.

NOTE: Before mounting the Tank GT20 in a rack, ensure that all internal components have been installed and that the unit has been fully tested. Maintenance can be performed on the unit while in a rack but it is preferable to install the device in a fully operational condition.

Screws List (including screws for SMDC)

A: Flat 6#-32 x4~x16

B: B-type 6#-32 x4


C: M4-4L x8

D: M4-5L x4

E: M4-8L x8


F: M4-15L x2

G: 13.5mm stand-off x1

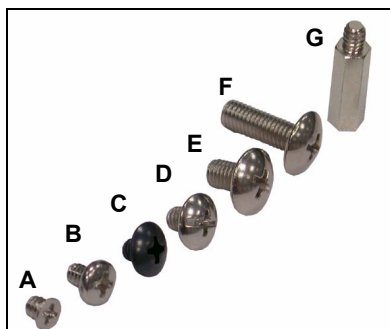


Installing the Inner Rails to Chassis

1. Screw the mounting ear to each side of GT20 as shown using 2 screws from the supplied screws kit.

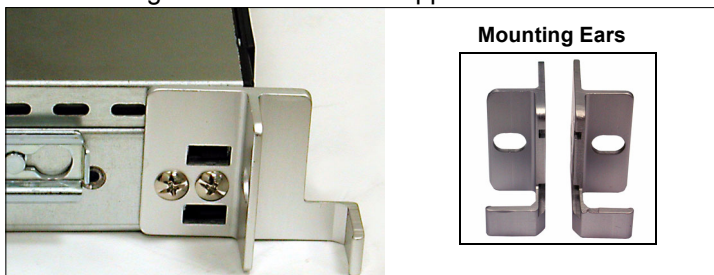


2. Draw out the inner rails from rail assembly. Install inner rails to left and right sides of chassis using 2 M4-5L(D) screws for each side.

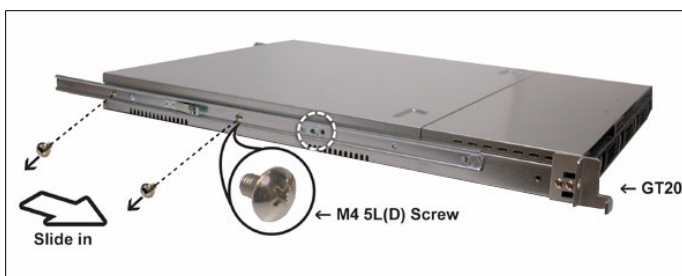


Installing Outer Rails to the Rack


3. Measure the distance between inner side of the front and rear mounting brackets in the rack.

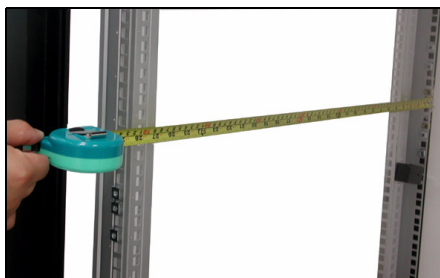


4. Locate the front and rear brackets.

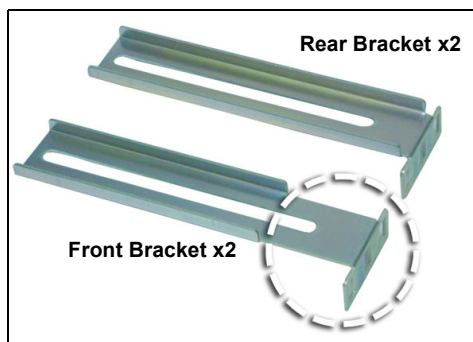

5. Reserve 90mm for GT20 on the front bracket. Secure the front bracket to outer rail with 2 M4-4L(C) screws.

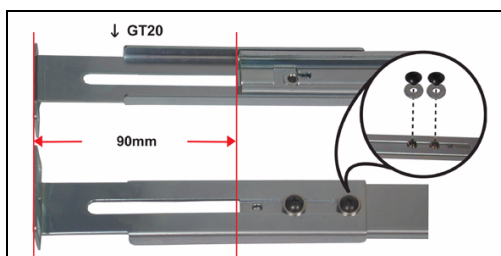


6. Reserve the distance same as in Step 2 on rear bracket. Secure the rear bracket to outer rail with 2 M4-4L(C) screws.

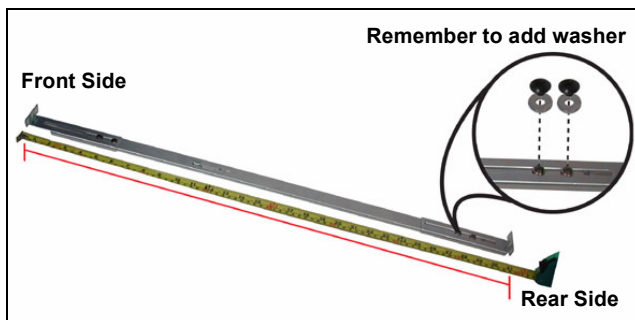


7. Secure the outer rail to the rack using 2 brackets and 4 M4-8L(E) screws for each side (A). Secure the mounting brackets from inside, not outside, of the rack (B).


A

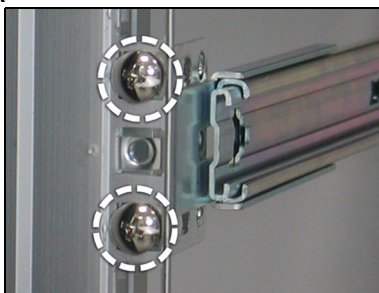

Mounting Bracket



B

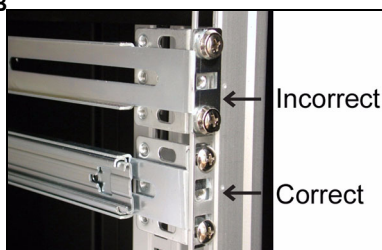


Rackmounting the Server

8. Draw out the middle rail to the latch position.




9. Lift the chassis and then insert the inner slide rails into the middle rails.

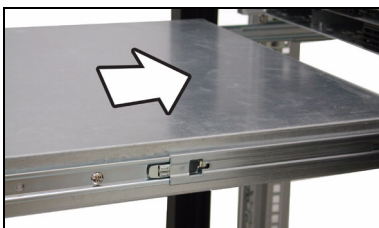


10. Push the chassis in and press the latch key (A). Then push the whole system into the rack (B).

A



B



11. Secure the mounting ears of chassis to the rack with 2 M4-15L(F) screws.



Note: To avoid injury, it is strongly recommended that two people lift the GT20 into the place while a third person screws it to the rack.

2.2 Installing Motherboard Components

This section describes how to install components on to the motherboard, including CPU, memory modules and PCI card.

2.2.1 Removing the Chassis Cover

Follow these instructions to remove the Tank GT20 chassis cover.

1. Remove the screw on the back side. Then slide the chassis cover in the direction of arrow.




2. Lift the cover off.





2.2.2 Installing the Memory

Follow these instructions to install the memory modules on the motherboard.

1. Locate the memory slots on the motherboard.
2. Press the memory slot locking levers in the direction of the arrows as shown in the following illustration.

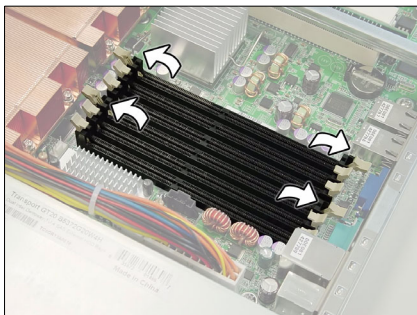


3. Install memory in the slots starting with DIMM A1 and DIMM B1. When inserted properly, the memory slot locking levers lock automatically onto the indentations at the ends of the module. For optimal system operation, please install memory **in pairs**.

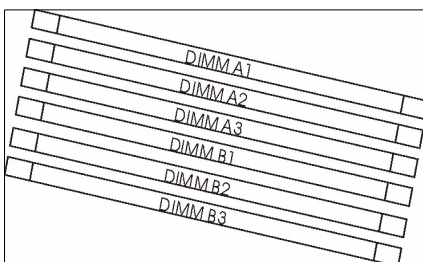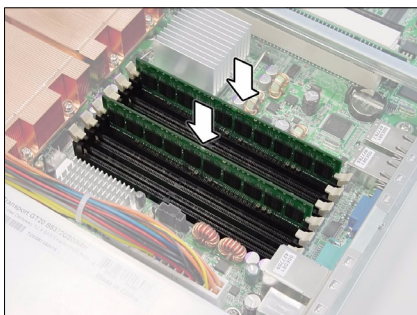


2.2.3 Installing the CPU and Heatsink



1. Follow these instructions to install the CPU and CPU heatsink.
2. Locate the CPU sockets. Remember to start with CPU0 first.

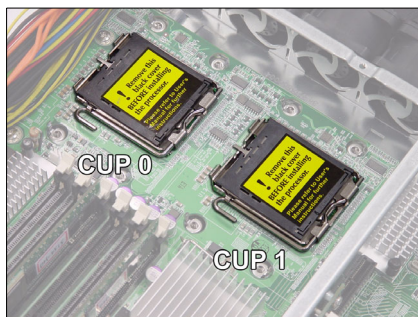


3. To make the heatsink installation easier, remove the load plate.

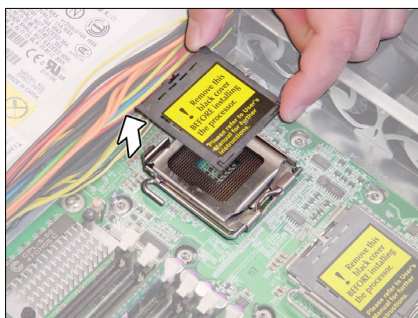


4. Pull the CPU lever up to release the CPU socket to a fully open position.

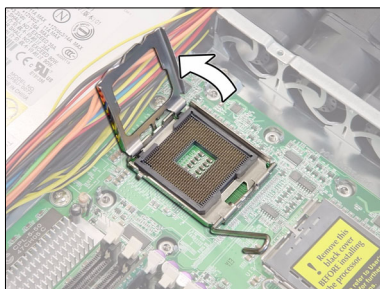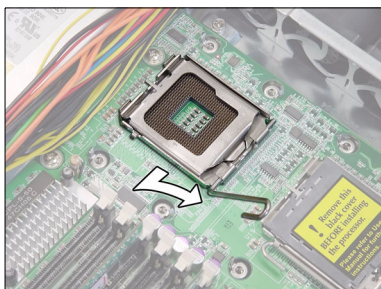


5. Place the CPU on the CPU socket, ensuring that pin 1 is located in the right direction.

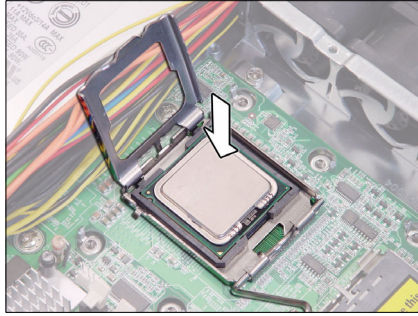

6. Press the CPU socket lever down in the direction shown to secure the CPU.

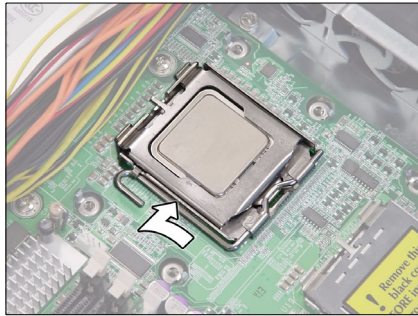

7. Screw the heatsink to the motherboard following the indicated order.

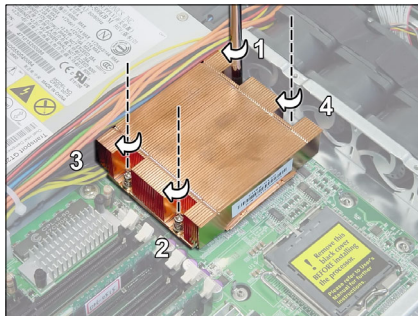


8. Repeat the same procedures to install CPU and heatsink for the second CPU socket.


2.2.4 Installing the PCI-X Card

Follow these instructions to install a PCI-X card.


1. Push the tab of PCI-X slot on the rear panel in the direction as shown to release the I/O shield.

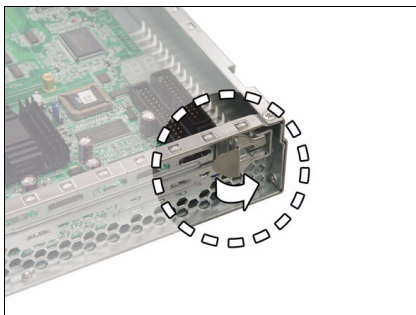


2. Move the I/O shield to right as shown and then take off the I/O shield.

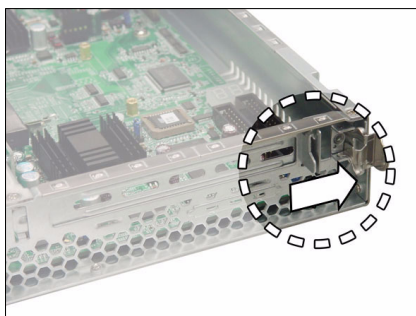

3. Insert the PCI-X card in the directions of arrow as shown.

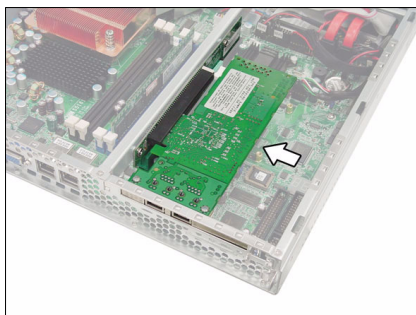

4. Push the tab of PCI-X slot on the rear panel in the direction as shown to secure PCI-X card.

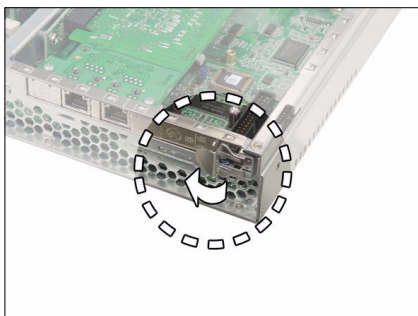


2.3 Installing the External Hard Drive


The GT20 chassis kit supports external SATA or SCSI hard drives.

Follow these instructions to install an external SATA or SCSI hard drive.


1. Press the locking lever latch in the direction of arrow (A) and then pull the locking lever open (B).

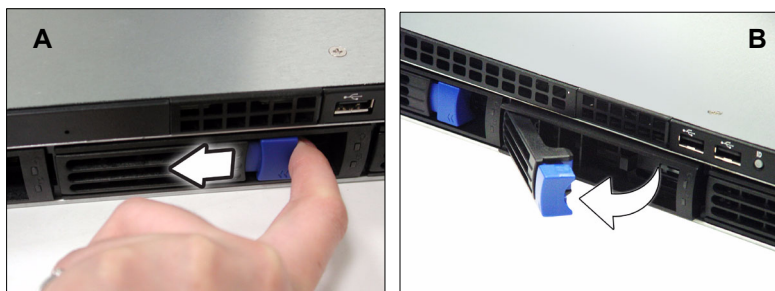


2. Slide the drive tray out.

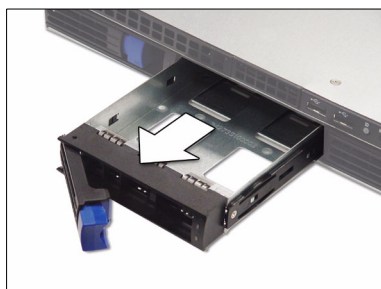

3. Place a hard drive into the drive tray.

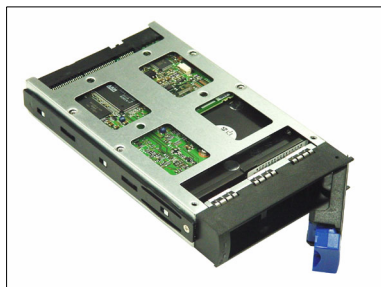


- Using 4 HDD screws to secure the HDD.

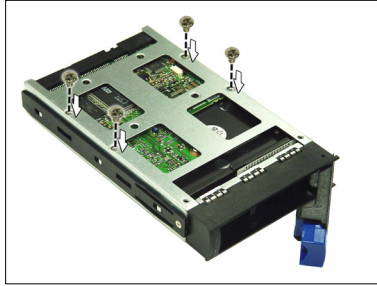


- Reinsert the drive tray into the chassis (A), ensuring that the drive tray is completely inserted into the chassis (B).


A

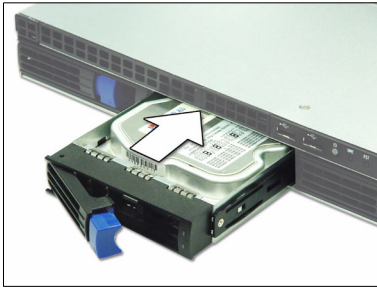

B

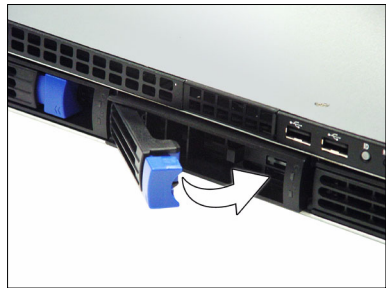


- Pressing the locking lever to secure the hard drive tray.

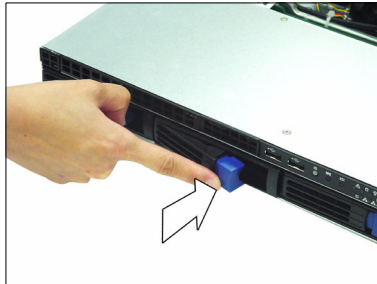


2.4 Installing the Slim FDD (Option)

1. Locate the two FDD rails and screws from the FDD kit. Secure the two rails to FDD using four screws.


FDD Rails & Screws

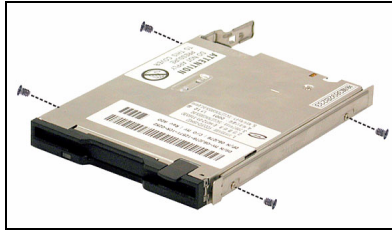


2. Connect the FFC cable to FDD.




3. Using a screw driver to pull open the door of FDD tray.



4. Insert FDD module into the tray.





5. Connect the FFC cable to the connector on M1012 adapter board.

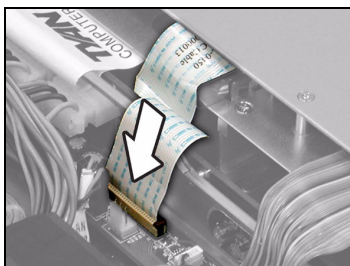


6. Locate the FDD cable from FDD kit. Connect the wrinkle side to the connector on M1012 adapter board. Refer to the picture below for the correct direction.

For Mainboard

For M1012



7. Connect the other side to the connector on motherboard.

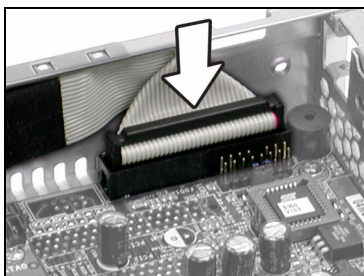

Chapter 3: TankReplacing Pre-Installed Components

3.1 Introduction

This chapter explains how to replace pre installed components including the motherboard, LED control board, HDD, and CD-ROM drive.

Take note of the precautions in this section when installing your system.

3.1.1 Work Area

Make sure you have a stable, clean working environment. Dust and dirt can get into components and cause malfunctions. Use containers to keep small components separated. Putting all small components in separate containers keeps them from becoming lost. Adequate lighting and proper tools can prevent you from accidentally damaging the internal components.

3.1.2 Tools

The procedures that follow require only a few tools, including the following:

- A cross head (Phillips) screwdriver
- A grounding strap or an anti-static pad

Most of the electrical and mechanical connections can be disconnected using your fingers. It is recommended that you do not use needle-nosed pliers to remove connectors as these can damage the soft metal or plastic parts of the connectors.

3.1.3 Precautions

Components and electronic circuit boards can be damaged by static electricity. Working on a system that is connected to a power supply can be extremely dangerous. Follow the guidelines below to avoid damage to the Tank GT20 or injury to yourself.


- Ground yourself properly before removing the top cover of the system. Unplug the power from your computer power supply and then touch a safely grounded object to release static charge (i.e. power supply case). If available, wear a grounded wrist strap. Alternatively, discharge any static electricity by touching the bare metal chassis of the unit case, or the bare metal body of any other grounded appliance.
- Avoid touching motherboard components, IC chips, connectors, memory modules, and leads.
- The motherboard is pre-installed in the system. When removing the motherboard, always place it on a grounded anti-static surface until you are ready to reinstall it.
- Hold electronic circuit boards by the edges only. Do not touch the components on the board unless it is necessary to do so. Do not flex or stress circuit boards.
- Leave all components inside the static-proof packaging that they ship with until they are ready for installation.
- After replacing optional devices, make sure all screws, springs, or other small parts are in place and are not left loose inside the case. Metallic parts or metal flakes can cause electrical shorts.

Notes:

- All connectors are keyed to only attach one way.
- Always use the correct screw size as indicated in the procedures.

3.2 Disassembly Flowchart

The following flowchart outlines the disassembly procedure.

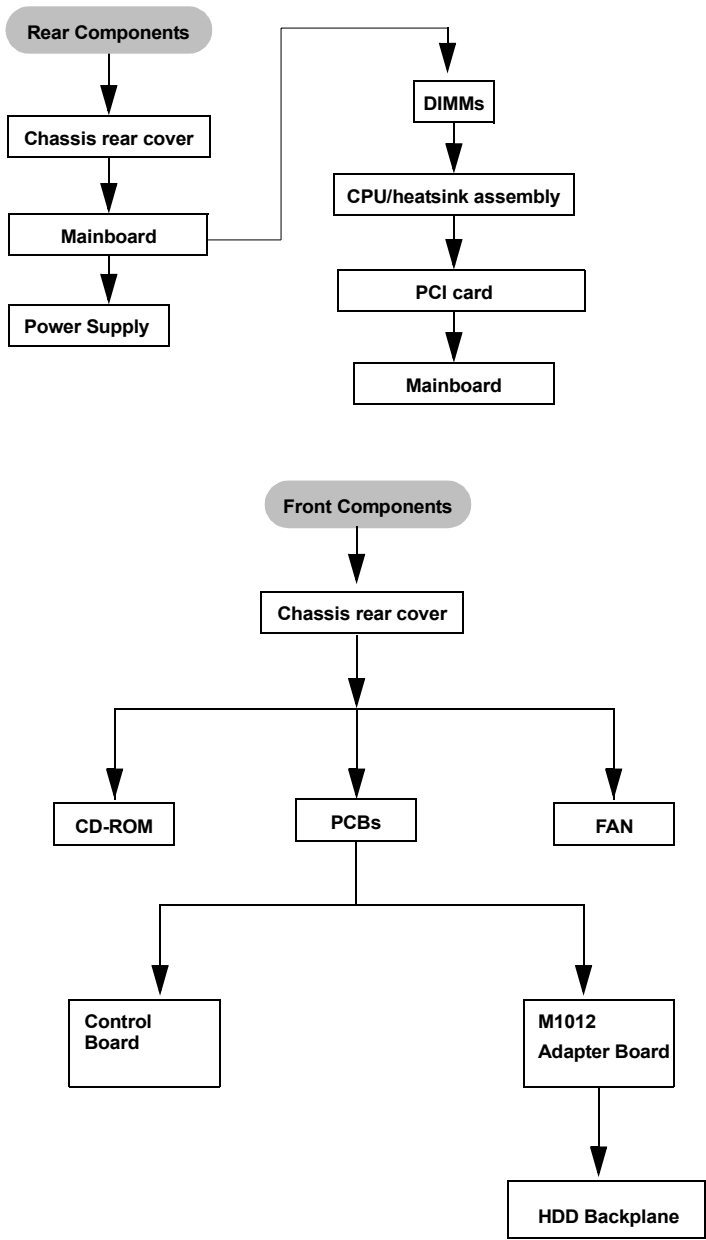


3.3 Removing the Cover

Before replacing any parts you must remove the chassis cover.

Follow these instructions to remove the cover of the Tank GT20 chassis cover.

1. Remove the screw on the back side. Then slide the chassis cover in the direction of arrow.

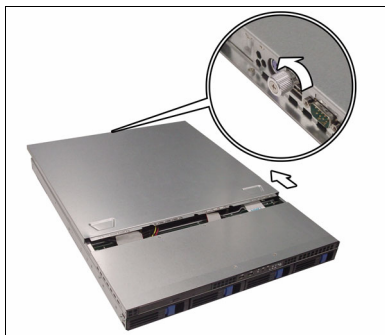

2. Lift the cover off.




3.4 Replacing Motherboard Components

Follow these instructions to replace motherboard components, including the motherboard.


3.4.1 Disconnecting All Motherboard Cables

Before replacing the motherboard or certain components, remove cables connected to the motherboard. Follow these instructions to remove all motherboard cabling.



1. Disconnect ATX power cables.

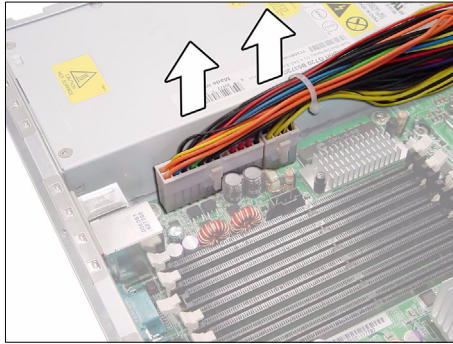

2. Disconnect CD-ROM drive cable.

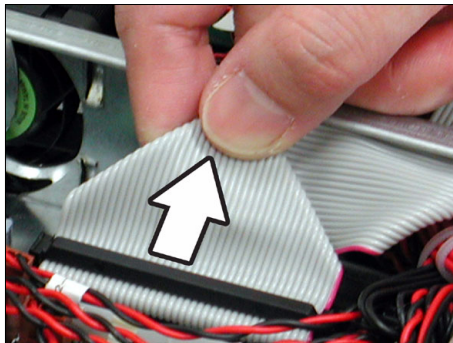


3. Disconnect all cables from front panel, USB, fans and SATA connectors.

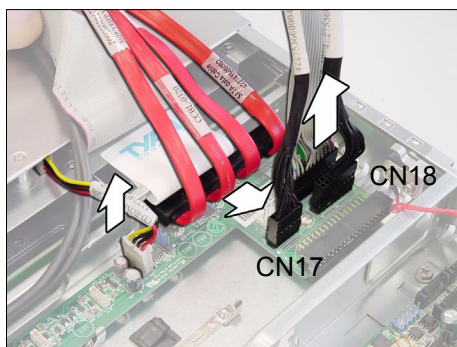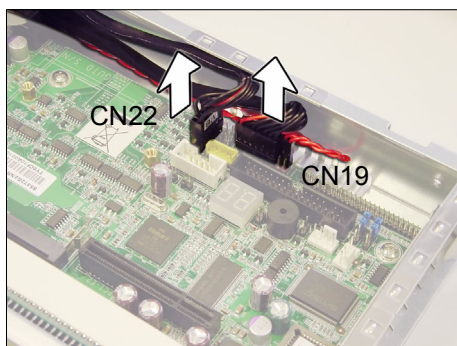


3.4.2 Removing the Motherboard

After removing all of those cables, follow these instructions to remove the motherboard from the chassis.

1. Remove the link bar.

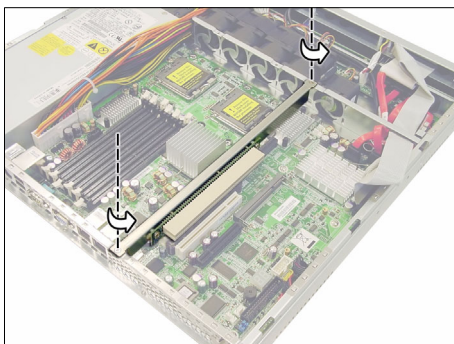

2. Remove nine screws securing the motherboard to the chassis.

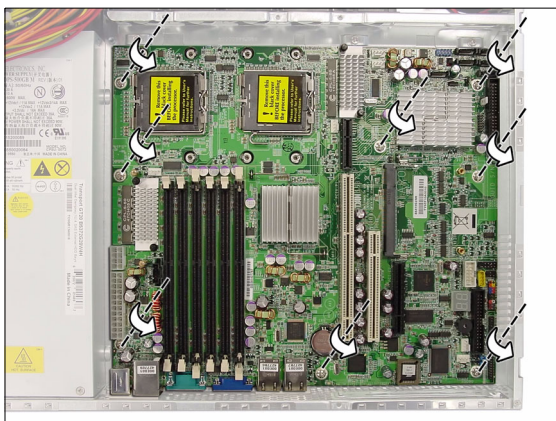


3. Remove the motherboard.


3.5 Replacing the Slim CD-ROM

Follow these instructions to replace the CD-ROM.

1. Remove power and data cables from the slim CD-ROM adapter.

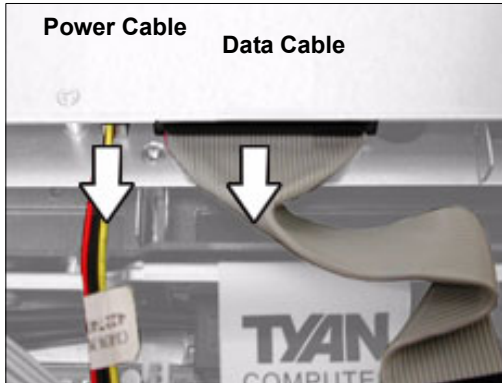

2. Press the tab in the directions as show to release the CD-ROM drive.

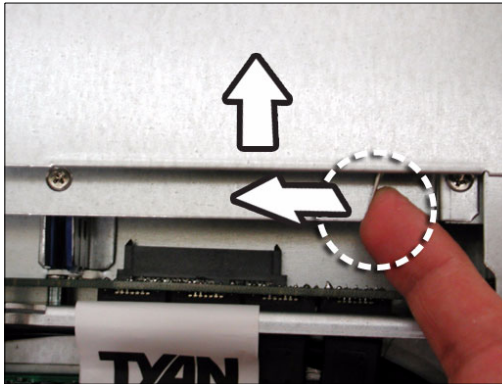

3. The CD-ROM drive will be freed from the drive bay after pressing the tab.



4. Remove two screws that secure CD-ROM drive to the bracket.



5. Replace the CD-ROM drive.



6. Secure CD-ROM to the bracket using two screws. Then replace the unit into the drive bay and connect the CD-ROM power and data cables.


3.6 Replacing the LED Control Board

Follow these instructions to replace the LED control board.


1. Remove two screws securing LED control board unit to the chassis.




2. Lift the LED control board unit free of the chassis.

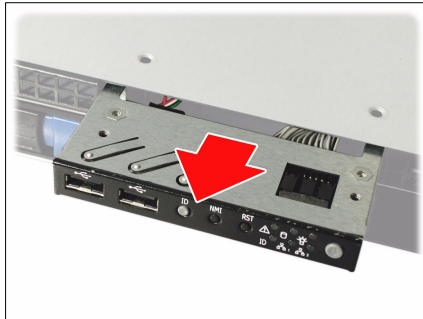

3. Remove three screws securing LED control board to the bracket.



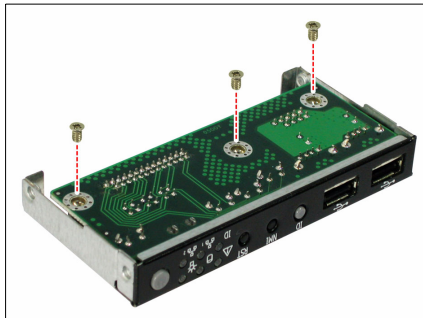



4. Lift the LED control board free from the chassis. After replacement, insert the unit into the chassis.

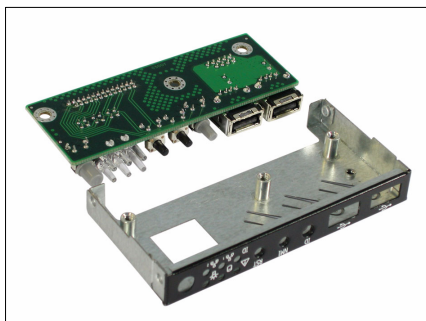


3.7 Replacing the M1012 Adapter Board

1. Remove all of those cables connected to the adapter board, including fan cables, CD-ROM power cable, front LED panel cable, power cables, and SATA cables.

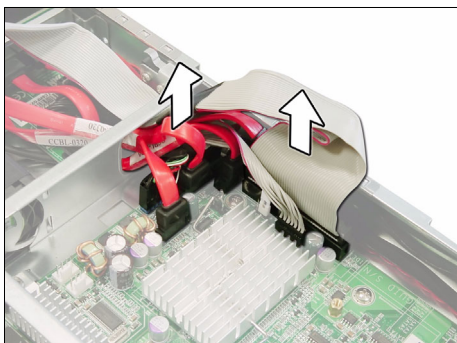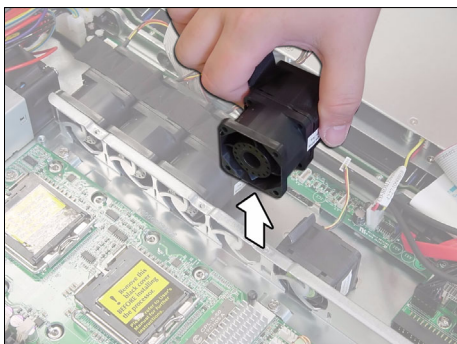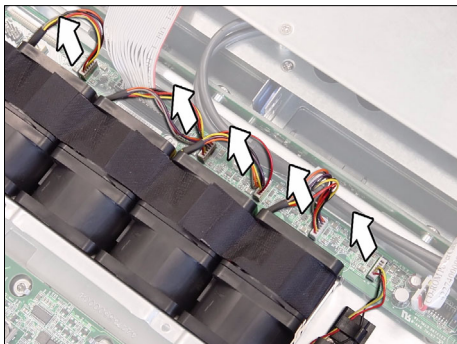


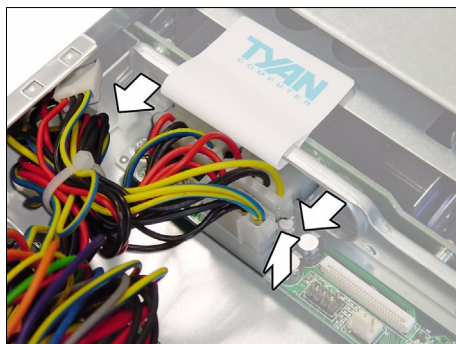

2. Remove six screws to release the adapter board.

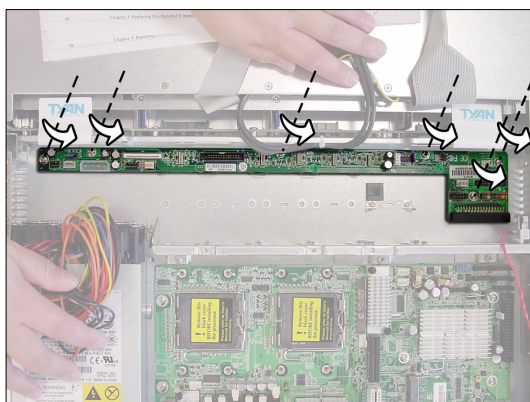


3.7.1 M1012 Adapter Board Features for B5372

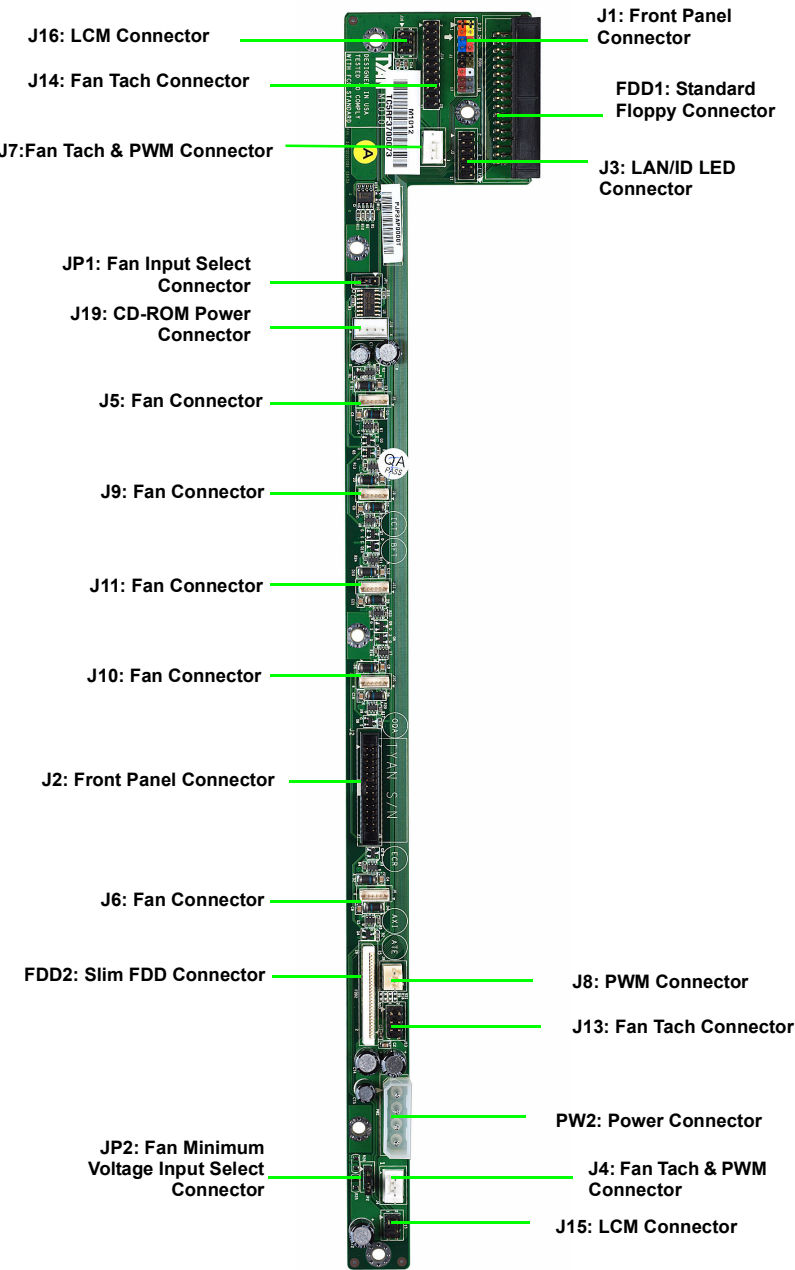

3.7.2 System Fan Connection

The following tables provide the information for system fan connection.

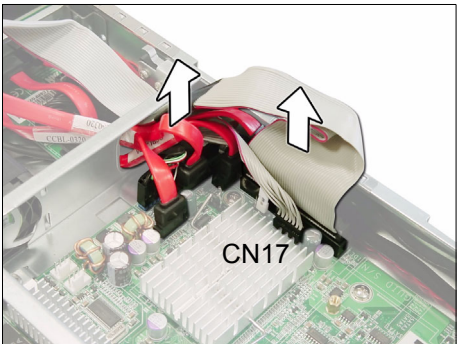

System Fan Speed Control Signal

M1012 Adapter Board	Connect to	Motherboard
J14 (PWM Signal)	→	CN17 (PWM Signal)

System Fan Monitoring Signal

Barebone System Fan	Connect to	Motherboard Fan
J14 (Fan 1~9)	→	CN17

3.7.3 M1012 Adapter Board Connector Pin Definition

J1 TYFP Front Panel Connector

1	HDLED+	2	PW_LED+
3	HDLED -	4	PW_LED -
5	RESET-	6	PWR_SW+
7	RESET+	8	PWR_SW -
9	VOLTAGE5	10	WLED+
11	EXT_INT	12	WLED-
13	V5SB	14	KEY PIN
15	ICH_SMBDAT	16	GND
17	ICH_SMBCLK	18	INTRU#

J2 Front Panel Connector

1	HDLED+	2	HDLED-
3	RESET+	4	RESET-
5	PW_LED+	6	PW_LED-
7	WLED+	8	WLED -
9	ICH_SMBDAT	10	ICH_SMSCLK
11	EXT_INT	12	VOLTAGE5
13	V5SB	14	INTRU#
15	PWR_SW+	16	PWR_SW-
17	LAN1_LED+	18	LAN1_LED -
19	LAN2_LED+	20	LAN2_LED-
21	LAN3_LED+	22	LAN3_LED-
23	ID_LED+	24	ID_LED-
25	ID_SW+	26	ID_SW-
27	KEY PIN	28	NC

J3 LAN/ID LED Connector

1	LAN1_LED+	2	LAN1_LED-
3	LAN2_LED+	4	LAN2_LED-
5	LAN3_LED+	6	LAN3_LED-
7	ID_LED+	8	ID_LED-
9	ID_SW+	10	ID_SW-
11	KEY PIN	12	NC

FAN Signal Related Connector Pin Definition

NOTE: The FAN signal naming is based on HW circuit design only. It might be different from the system fan naming.

J4 Fan TACH & PWM Connector

1	GND
2	NC
3	FAN1_TACH
4	PWM1 (Default)

J7 Fan TACH & PWM Connector

1	GND
2	NC
3	FAN7_TACH
4	PWM1 (Default)

J8 PWM Connector

1	GND
2	PWM2
3	FAN1_TACH

J13 Fan TACH Connector

1	GND	2	FAN1_TACH
3	GND	4	FAN2_TACH
5	GND	6	FAN3_TACH
7	KEY PIN	8	NC

J14 Fan TACH Connector

1	GND	2	FAN1_TACH
3	GND	4	FAN2_TACH
5	GND	6	FAN3_TACH
7	GND	8	FAN4_TACH
9	GND	10	FAN5_TACH
11	GND	12	FAN6_TACH
13	GND	14	FAN7_TACH
15	GND	16	FAN8_TACH
17	GND	18	FAN9_TACH
19	GND	20	FAN10_TACH
21	KEY PIN	22	PWM

J6 Fan Connector

1	FAN1_12VPWM
2	FAN1_TACH
3	GND
4	GND
5	FAN2_TACH
6	FAN2_12VPWM

J10 Fan Connector

1	FAN3_12VPWM
2	FAN3_TACH
3	GND
4	GND
5	FAN4_TACH
6	FAN4_12VPWM

J11 Fan Connector

1	FAN5_12VPWM
2	FAN5_TACH
3	GND
4	GND
5	FAN6_TACH
6	FAN6_12VPWM

J9 Fan Connector

1	FAN7_12VPWM
2	FAN7_TACH
3	GND
4	GND
5	FAN8_TACH
6	FAN8_12VPWM

J5 Fan Connector

1	FAN9_12VPWM
2	FAN9_TACH
3	GND
4	GND
5	FAN10_TACH
6	FAN10_12VPWM

J15 & J16 LCM Connectors

1	LCM_+5V	2	LCM_SIN
3	KEY PIN	4	GND
5	LCM_+5VSB	6	LCM_SOUT

JP1 Fan Input Select Connector


Pin1 & Pin2 Close	Fan PWM signal from J8
Pin2 & Pin3 Close	Fan PWM signal from J4, J7 & J14 (Default)

JP2 Fan Input Select Connector


Pin1 & Pin2 Close	0V
Pin2 & Pin3 Close	+5V (Default)

3.8 Replacing the SATA Backplane


1. After removing the M1012 adapter board, disconnect those cables connected to the SATA backplane, including SATA and power cables.
2. Grab the two tabs to lift the SATA backplane off.

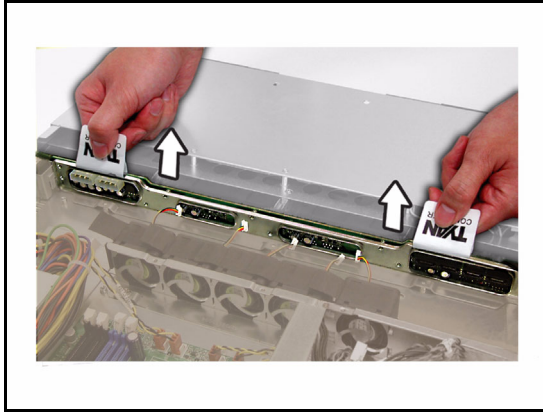

3. Remove ten screws that secure the bracket to the adapter board.

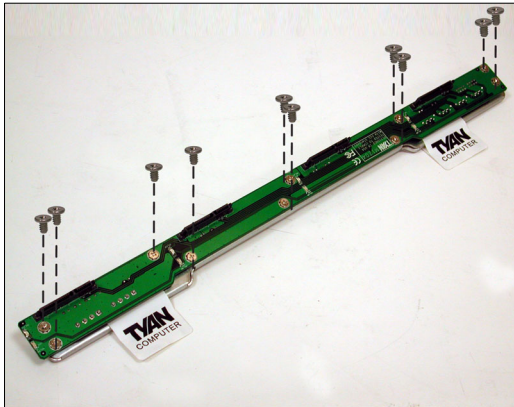


4. Release the adapter board free from the bracket.

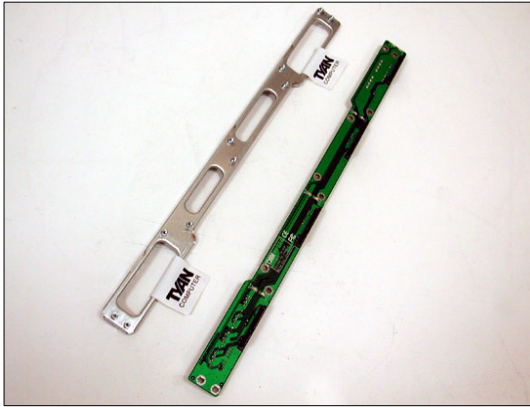

5. After replacement, place and secure the unit into the chassis following the reverse procedures from step 1 to 4.

3.8.1 SATA Backplane Features

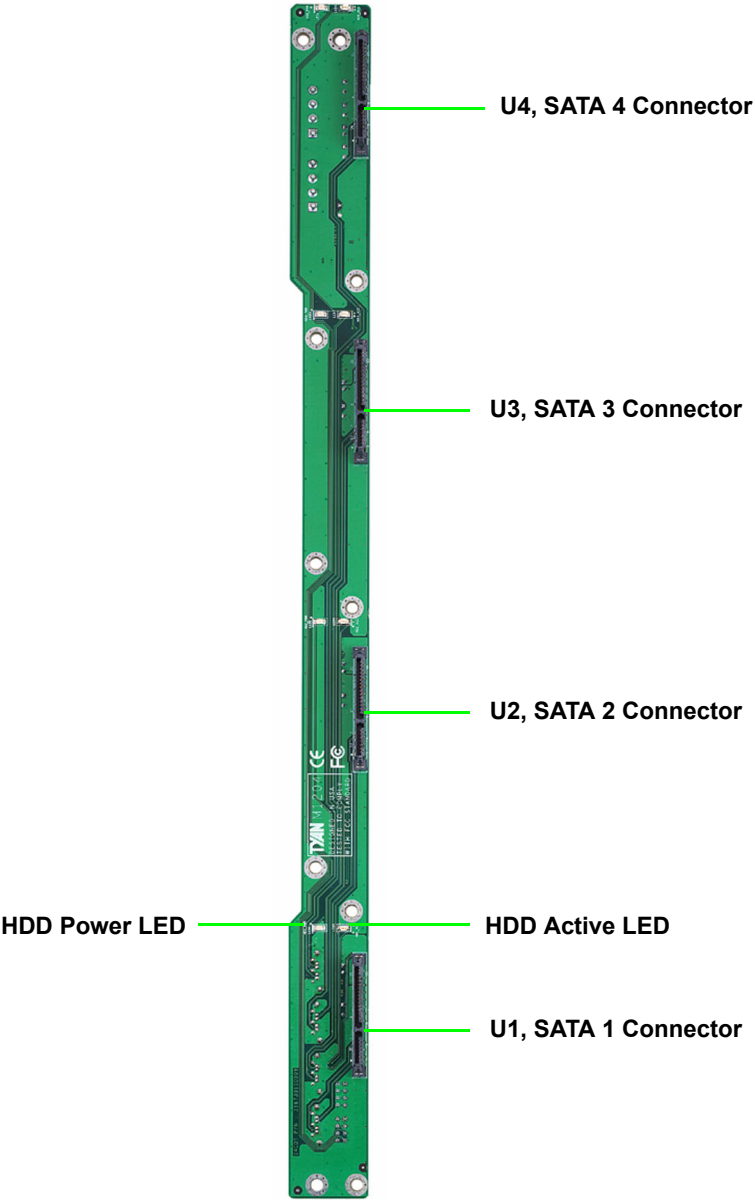




3.9 Replacing the Power Supply


1. Remove two screws securing the power supply to the chassis.



2. Remove the screw securing fan assembly to the chassis.

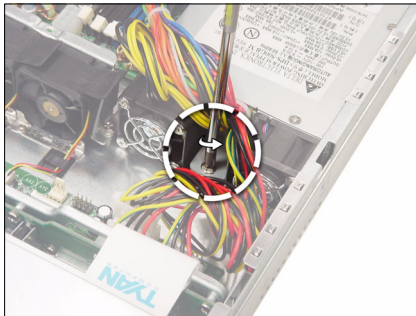

3. Lift the power supply free from the chassis. After replacement, place and secure the unit into the chassis following the reverse procedures from steps 1 to 2.

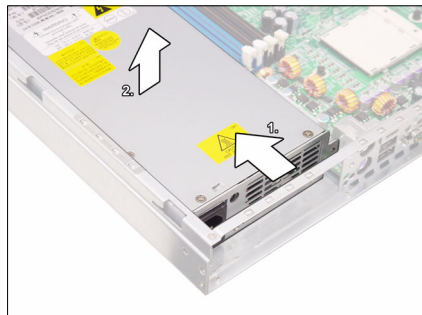

Appendix I: BIOS Differences

The following table displays the differences in BIOS between B5372 and S5372. For a complete review of S5372 BIOS, refer to the motherboard manual.

	S5372 Mainboard	B5372 Barebone
Advanced		
Floppy Configuration	Floppy A [1.44 MB 3 1/2 "]	Floppy A [Disabled]
Hardware Monitor Fan Control	Auto Fan Control [Disabled]	Auto Fan Control [Enabled]
	CPU0, CPU1, FAN1, FAN2, FAN3, FAN4	FAN1, FAN2, FAN3, FAN4, FAN5, FAN6, FAN7, FAN8, FAN9

Appendix II: Cable Connection Tables

SATA Cable

Table 1: B5372G20V4H Model

M1208 SATA Backplane	Connect to	Motherboard
SATA 1 (J1)	→	SATA 0
SATA 2 (J2)	→	SATA 1
SATA 3 (J3)	→	SATA 2
SATA 4 (J4)	→	SATA 3

FAN Cable

Table 2: System Fan to M1012 Adapter Board

System Fan	Connect to	M1012
Fan 1~Fan 9	→	J14

Table 3: M1012 Adapter Board to Motherboard

M1012	Connect to	Motherboard Fan
J14	→	CN17

Power Supply Cable

Table 4: Power Supply to Motherboard

Power Supply	Connect to	Motherboard
P1 24-pin power cable	→	PW1 24-pin connector
P2 8-pin power cable	→	PW2 8-pin connector

Table 5: Power Supply to M1012 Adapter Board

Power Supply	Connect to	M1012
P4 4-pin power cable	→	PW2 4-pin connector

Table 6: Power Supply to M1208 SATA Backplane

Power Supply	Connect to	M1208
P6 4-pin power cable	→	PW1 4-pin connector
P7 4-pin power cable	→	PW2 4-pin connector

Other Cables

Table 7: M1012 Adapter Board to Motherboard

M1012	Connect to	Motherboard
J1 Front Panel connector	→	CN19 (TYFP1)
J3 (LAN / ID LED)	→	CN22 (TYFP2)

Table 8: M1003 Front Panel Control Board Related Cable

M1003 J1 USB connector	→	Motherboard CN12 (USB2)
M1003 J2 connector	→	M1012 J2 connector

Table 9: CD-ROM Related Cable

Motherboard PRE-IDE connector (CN18)	→	CD-ROM Backplane
M1012 J19 power connector	→	CD-ROM Backplane

Table 10: FDD Related Cable (Option)

M1012 FDD1 connector	→	Motherboard CN16 FDD
M1012 FDD2 connector	→	Slim FDD drive

Appendix III: Installing SMDC Cards

The following provides you with the information on installing SMDC cards. You may refer to the following for installing M3289 or M3290 into HDD tray or chassis.

Screws List (including screws for Rail)

A: Flat 6#-32 x4~x16

B: B-type 6#-32 x4


C: M4-4L x8

D: M4-5L x4

E: M4-8L x8


F: M4-15L x2

G: 13.5mm stand-off x1

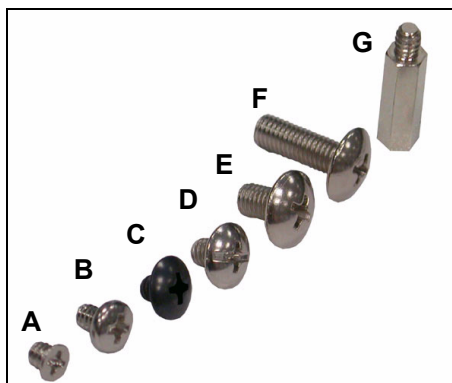


Installing M3289 into HDD Tray


1. Fold up the cable.

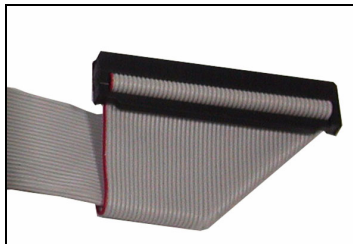


2. a: Choose a HDD tray. b: Insert the cable into the rear of HDD tray. c: Pull the cable out.

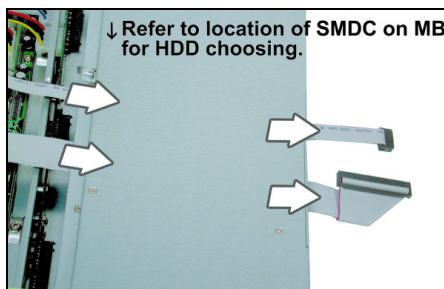


3. Connect the cable to M3289.

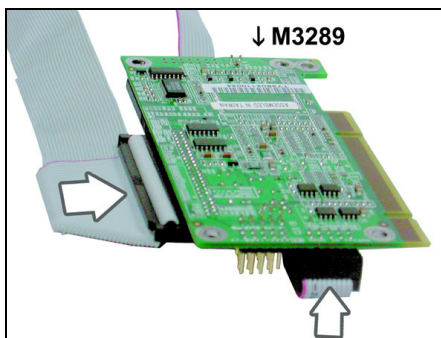


4. Align M3289 in reverse with 4 “M1” stand-offs. Secure the SMDC with 4 screws as illustrated.

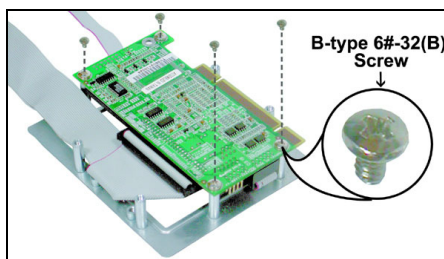

5. Secure M3289 onto HDD tray as illustrated.

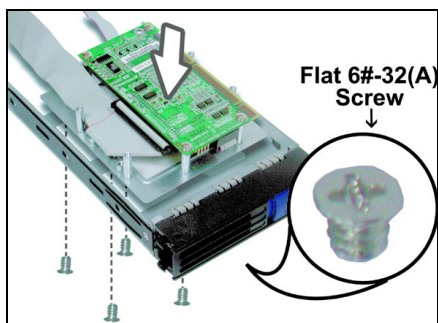


6. Insert and secure the HDD tray. **NOTE:** For internal or dummy HDD tray, secure the HDD tray with 1 or 2 screws.

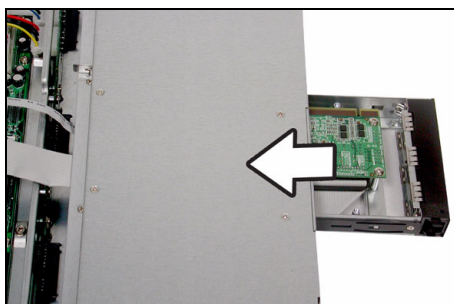


7. Arrange and connect the cable to SMDC connector on mainboard. Be careful not to block the air flow.

Installing M3290/M3291 into HDD tray


- 1. Secure a removable stand-off of 13.5mm to the location of “M2” stand-off as illustrated on SMDC bracket.

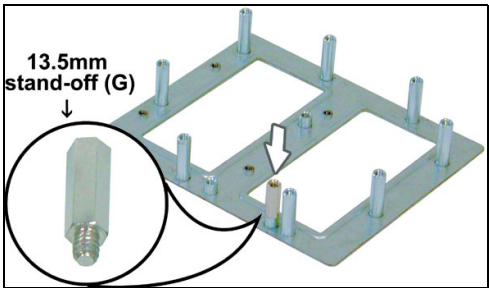


- 2. Secure M3290 in reverse to 4 “M2” stand-offs on bracket.

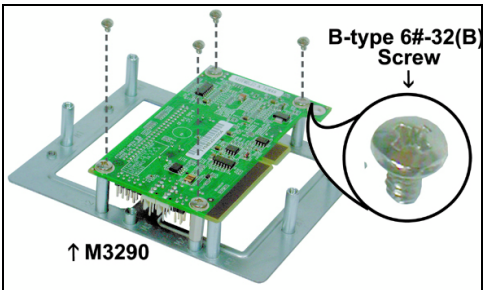

- 3. a: Choose a HDD tray. **NOTE:** Refer to the location of SMDC connector on mainboard for choosing a HDD tray.
b: Secure SMDC to the HDD tray.

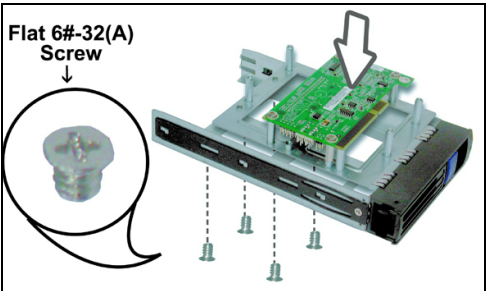

4. a: Inset the cable into the rear of HDD tray. b: Connect the cable to M3290. c: Insert and secure HDD tray.

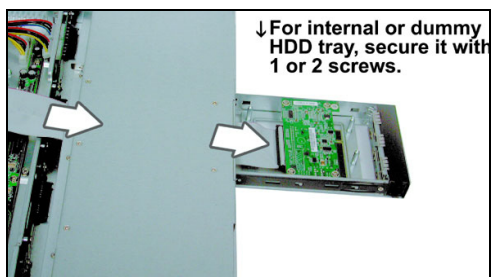


5. Arrange and connect the cable to SMDC connector on mainboard. Be careful not to block the air flow.


Installing M3290/M3291 into GT24 Chassis

NOTE: The products produced now may not support the procedures below. We'll provide you with the upgraded models as soon as possible.


1. Disconnect the power connectors on HDD backplane and M1012.

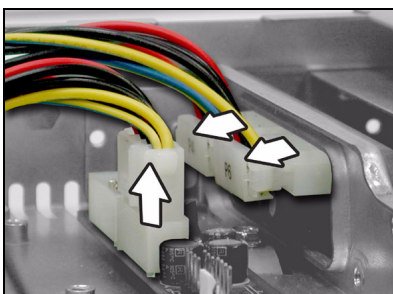


2. Push the power cables aside.

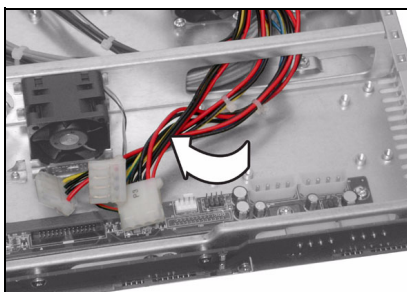


3. Align M3290 with 4 "M2" PC stand-offs. Secure M3290 to mainboard with 4 screws.

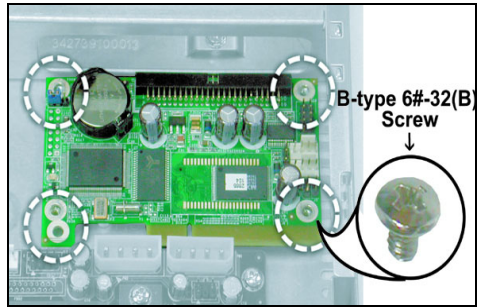

4. Connect the cable to M3290. Arrange and connect the cable to SMDC connector on mainboard. Be careful not to block the air flow.

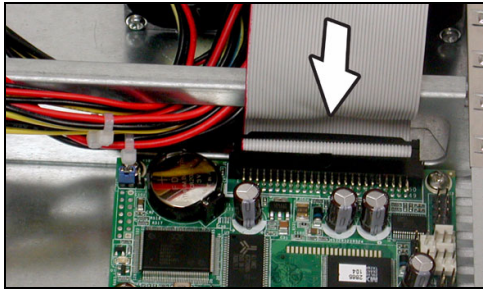

5. Reconnect the power connectors on HDD backplane and M1012.

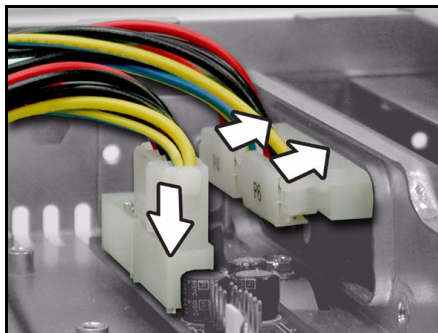

Technical Support

If a problem arises with your system, you should first turn to your dealer for direct support. Your system has most likely been configured or designed by them and they should have the best idea of what hardware and software your system contains. Hence, they should be of the most assistance for you. Furthermore, if you purchased your system from a dealer near you, take the system to them directly to have it serviced instead of attempting to do so yourself (which can have expensive consequences).

If these options are not available for you then Tyan Computer Corporation can help. Besides designing innovative and quality products for over a decade, Tyan has continuously offered customers service beyond their expectations. Tyan's website (www.tyan.com) provides easy-to-access resources such as in-depth Linux Online Support sections with downloadable Linux drivers and comprehensive compatibility reports for chassis, memory and much more. With all these convenient resources just a few keystrokes away, users can easily find the latest software and operating system components to keep their systems running as powerful and productive as possible. Tyan also ranks high for its commitment to fast and friendly customer support through email. By offering plenty of options for users, Tyan serves multiple market segments with the industry's most competitive services to support them.

"Tyan's tech support is some of the most impressive we've seen, with great response time and exceptional organization in general" - Anandtech.com

Please feel free to contact us directly for this service at tech-support@tyan.com

Help Resources:

1. See the beep codes section of this manual.
2. See the TYAN website for FAQ's, bulletins, driver updates, and other information: <http://www.tyan.com>

3. Contact your dealer for help BEFORE calling TYAN.
4. Check the TYAN user group: alt.comp.periphs.main-board.TYAN

Returning Merchandise for Service

During the warranty period, contact your distributor or system vendor FIRST for any product problems. This warranty only covers normal customer use and does not cover damages incurred during shipping or failure due to the alteration, misuse, abuse, or improper maintenance of products.

NOTE: A receipt or copy of your invoice marked with the date of purchase is required before any warranty service can be rendered. You may obtain service by calling the manufacturer for a Return Merchandise Authorization (RMA) number. The RMA number should be prominently displayed on the outside of the shipping carton and the package should be mailed prepaid. TYAN will pay to have the board shipped back to you.

Tank GT20 B5372 Service Engineer's Manual v1.0
Document part No. D1812-100